

# Inverter P Series

## Portable Generators

*RACERS. WINNERS. DREAMERS. DOERS.*

# WE ARE THE ENERGY GENERATION!



**POWERRUSH™**



# PRODUCT ADVANTAGES



**QUIET PERFORMANCE. AUTOMATICALLY ADJUSTS ENGINE SPEED TO SAVE FUEL AND REDUCE NOISE. DURABLE ENCLOSURE, EASY PORTABILITY MAKE IT THE IDEAL GENERATOR FOR A WIDE RANGE OF APPLICATIONS.**

**TRUEPOWER™ TECHNOLOGY PROVIDES CLEAN AND STABLE POWER, IDEAL FOR SENSITIVE ELECTRONICS. INTEGRATED USB PORTS TO CHARGE MOBILE DEVICES. SMART AND USER FRIENDLY CONTROL PANEL.**



## TECHNICAL DATA

	P 2000i	P 2200i	P 3000i	P 3500i	P 3500i/o
<b>Voltage</b>	230 V	230 V	230 V	230 V	230 V
<b>Max Power</b>	2.0 kW	2.1 kW	2.5 kW	3.3 kW	3.3 kW
<b>Rated Power</b>	1.6 kW	1.9 kW	2.3 kW	3 kW	3 kW
<b>Engine</b>	Yamaha	Pramac	Pramac	Pramac	Pramac
<b>Displacement</b>	79 cc	98 cc	149 cc	212 cc	212 cc
<b>Tank Capacity</b>	4.2 L	4.5 L	4 L	10 L	9 L
<b>Fuel</b>	Petrol	Petrol	Petrol	Petrol	Petrol
<b>Starting System</b>	Recoil	Recoil	Recoil	Recoil + Electric	Recoil
<b>Socket Type   Standard EU</b>	1 x Schuko 230V 16A + 12V DC 8A	1 x Schuko 230V 16A + 2 USB Outlets + 12V DC 8A	2 x Schuko 230V 16A + 2 USB Outlets	2 x Schuko 230V 16A + 2 USB Outlets	2 x Schuko 230V 16A + 2 USB Outlets
<b>Socket Type   UK</b>	1 x 230V 13A 3 Pin + 12V DC 8A		2 x 230V 13A 3 Pin + 2 USB Outlets	2 x 230V 13A 3 Pin + 2 USB Outlets	2 x 230V 13A 3 Pin + 2 USB Outlets
<b>Socket Type   Australia</b>	1 x 15 Amps + 12V DC 8A		2 x 15 Amps + 2 USB Outlets	2 x 15 Amps + 2 USB Outlets	2 x 15 Amps + 2 USB Outlets
<b>Noise emission at 7 m</b>	59 dB(A)	66 dB(A)	61 dB(A)	61 dB(A)	66 dB(A)
<b>Dimension LxWxH mm</b>	535x277x468	428x231x370	565x339x467	601x458x552	490x430x417
<b>Weight</b>	22 KG	21 KG	27 KG	49.5 KG	34 KG
<b>POWERRUSH™</b>			✓	✓	✓
<b>Parallel kit   Standard EU</b>		✓	✓	✓	✓



### POWERRUSH™ MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS

POWERRUSH™ increases electrical current upon demand, above rated output when starting electric motors

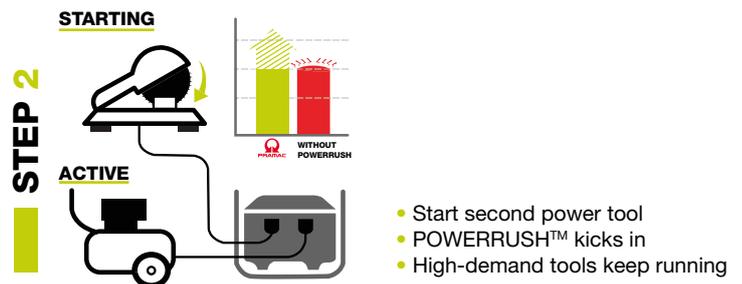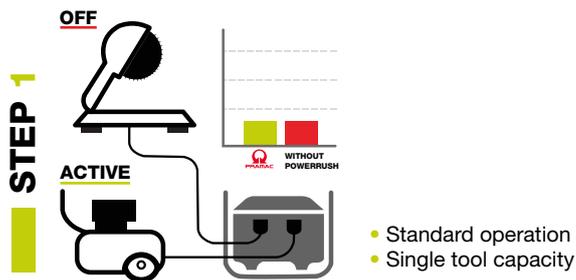

## DOUBLE YOUR POWER

The **Pramac Parallel Kit** allows you to double your power when pairing two inverter generators together with the same output\*.

\*Connect two Pramac inverter series for twice the power, not applicable to P2000i. Important: Applies when pairing two inverter generators with the same output. Parallel kit sold separately.



[www.pramac.com](http://www.pramac.com) | [www.pramacparts.com](http://www.pramacparts.com)

The product images shown are for illustration purposes only and may not be an exact representation of the product. The manufacturer reserves the right to introduce changes to models and features without prior notice. EN/07\_2021\_rev.3

